

24 ports POE switch, with 2 uplink Ethernet 10/100/1000Mbps ports and one uplink optical port, and CCTV long range mode (up to 250m range in POE ports). Web interface for the power management of POE ports.

DATA SHEET

TBK-SWPOE24B




MAIN FEATURES


- Switch 24-port 10 / 100Mbps HD video with POE power.
 - Up to 30W of power per PoE port.
- Uplink ports: 2 Ethernet 10/100/1000Mbps and 1 optical 1000Mbps.
 - LED status indicators.

SPECIFICATIONS	PARAMETERS	DESCRIPTION
Power	Power Supply	100~240V AC: 50/60Hz
	Consumption	<420W (Including PoE)
Network Connector	Network Ports	1 ~ 24: 10/100Mbps PoE port, which can work under standard mode (10/100Mbps) or CCTV mode (10Mbps, 250m range). UPLINK Ports: 2 x 10/100/1000Mbps Ethernet ports 1 x SFP Ports 1000Mbps (SFP module not included)
	Transmission Medium	Cat5/5e/6 Standard Network Cable
	PoE Protocol	IEEE802.3at/af
	PsE Type	End span
	PoE Power Output	54VDC, 30W max per port (Total 390W max).
Network Switch	Network Standard	IEEE802.3, IEEE802.3u, IEEE802.3ab, IEEE802.3z, IEEE802.3X
	Bandwith capacity	8.8Gbps
	Packet Transfer Rate	6.55 Mpps
	Switch Processing Scheme	Store and forward
	Package Data Cache	2.75M
	MAC address list	4K
Protection	Lightning Protection	6KV (IEC61000-4-5)
	ESD	6KV contact discharge 8KV air discharge (IEC61000-4-2)
Environmental	Working temperature	-10°C-50°C
	Storage temperature	-40°C-85°C
	Humidity (non-condensing)	5-95%
Mechanical	Dimension (L×W×H)	442mm×207mm×44.5mm
	Material	Aluminum
	Color	Black
	Weight	2,79kg

APPLICATION:

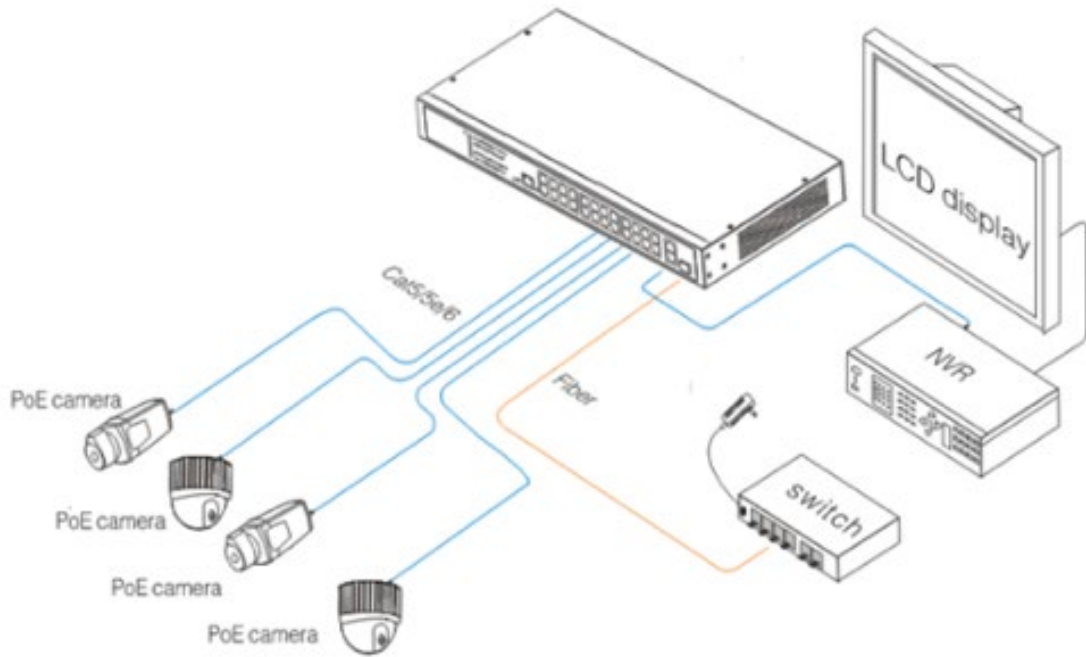

PHYSICAL FEATURES:

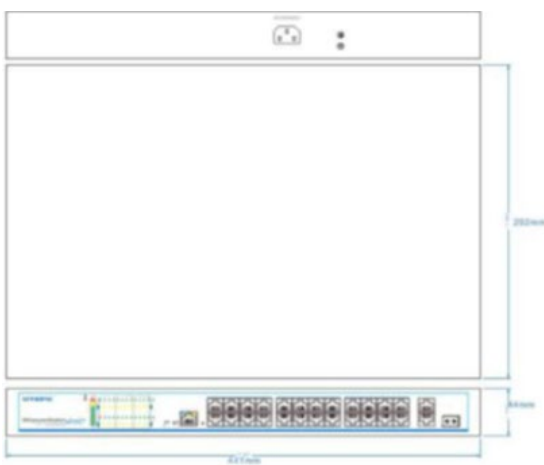

INTERFACE DRAWING:

