
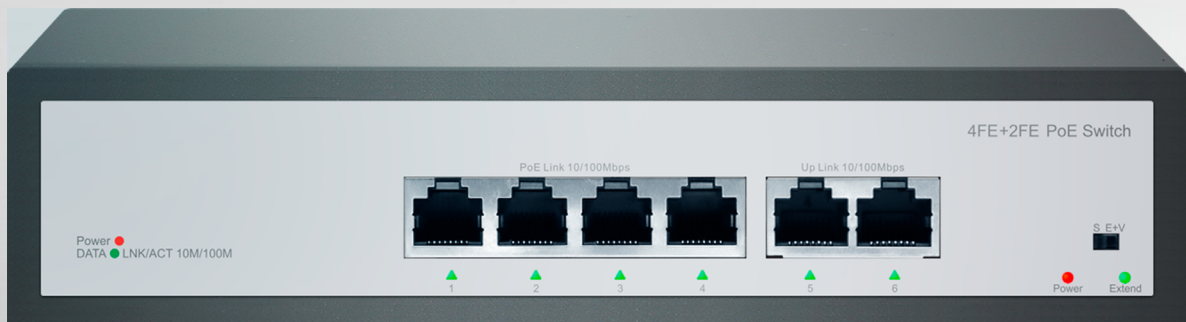


Switch PoE

TBK-SWPOE4SFP4



PRODUCT OVERVIEW

TBK-SWPOE4SFP4 100MBPS Ethernet PoE switch, this model provides four 100MBPS PoE ports, two 100MBPS uplink-ports, PoE ports meet the 802.3af/at standard. It supports two working modes (Standard, VLAN+Extend), the maximum power of the whole machine is 75W.

MAIN FEATURES

- 4*100Mbps RJ45 (PoE)
- 2*100Mbps uplink ports.
- Support PoE port isolation function (VLAN)
- 250 meters long distance transmission



TBK-SWPOE4SFP4 SPECIFICATIONS

Ports	1-4: 100Mbps PoE Ports
	1, 2: 100Mbps Uplink Ports
Input Voltage	110Vac-240Vac (Conventional 220Vac)
Input Frequency	47Hz-63Hz (Conventional 50Hz)
Input Current	Maximum 1.5A
Stand-by Power Consumption	Maximum 2W (No connection with camera or any device)
Impact Current	Maximum 100A (AC Input 110 Vac, Cold Boot)
Communication Standard	IEEE802.3, IEEE802.3u, IEEE802.3x
Network Transmission Medium	10/100/1000BASE-TX: UTP category 5,5e cable (≤100m)
Network Signal Distance	Transmission distance ≤250 meters
Backplane Bandwidth	1.6Gbps
Forwarding Methods	10BASE-tx:14880pps/port
	100BASE-tx:148800pps/port
MAC Address Table	1K
Ports Function	Power Supply Priority, quick forwarding and MAC address automatically learning and aging.
	Support IEEE802.3x full-duplex flow control and Back pressure half-duplex flow control.
Packet Forward Speed	1.19Mpps
PoE Connectivity Standard	IEEE 802.3af/at
PoE Port Output Power	Each Port ≤30W
PoE Output Voltage	DC52V±5%
PoE Power Supply Pair	1/2+, 3/6- cable pairing
POE Power Supply Transmission Distance	≤250 meters
Power Transmission Medium	10/100/1000BASE-TX: UTP category 5,5e cable (≤100m)
POE Total Power	MAX: 75W



TBK-SWPOE4SFP4 SPECIFICATIONS

Operating Temperature	-10°C~ 55°C
Storage Temperature	-40°C~ 85°C
Working Humidity	10% ~ 90% (non-condensed)
Storage Humidity	5% ~ 95% (non-condensed)
Product Parameter	Size: 200*118*44mm
	Weight: 600g±5%
Accessories	1* Rack Mount Kit
	1* User manual
	1* Power Supply



TBK-SWPOE4SFP4 SPECIFICATIONS

DIMENSIONS (Unit:mm)

